
SWsoft, Inc.

Remote Admin for SiteBuilder 2

Administrator's Guide

PLESK

ISBN: N/A
SWsoft, Inc.
13755 Sunrise Valley Drive
Suite 325
Herndon
VA 20171 USA
Phone: +1 (703) 815 5670
Fax: +1 (703) 815 5675

*Copyright © 1999-2005 by SWsoft, Inc. All rights reserved
Distribution of this work or derivative of this work in any form is prohibited unless prior written permission is
obtained from the copyright holder.*

*Linux is a registered trademark of Linus Torvalds.
ASPLinux and the ASPLinux logo are registered trademarks of SWsoft, Inc.
RedHat is a registered trademark of Red Hat Software, Inc.
Solaris is a registered trademark of Sun Microsystems, Inc.
X Window System is a registered trademark of X Consortium, Inc.
UNIX is a registered trademark of The Open Group.
Intel, Pentium, and Celeron are registered trademarks of Intel Corporation.
MS Windows, Windows 2003 Server, Windows XP, Windows 2000, Windows NT, Windows 98, and Windows 95
are registered trademarks of Microsoft Corporation.
IBM DB2 is a registered trademark of International Business Machines Corp.
SSH and Secure Shell are trademarks of SSH Communications Security, Inc.
MegaRAID is a registered trademark of American Megatrends, Inc.
PowerEdge is a trademark of Dell Computer Corporation.
Request Tracker is a trademark of Best Practical Solutions, LLC
All other trademarks and copyrights referred to are the property of their respective owners.*

Contents

Preface	4
About Remote Admin for SiteBuilder 2	4
Documentation Conventions	4
Typographical Conventions	5
Feedback	6
Installing Remote Admin for SiteBuilder2	7
System Requirements	7
Install Module	8
Getting Started with Module	9
Connecting to Remote SiteBuilder	9
Logging into Module	10
Adjusting SiteBuilder Preferences	12
Administering SiteBuilder	14
Adding Allowed Hosts	15
Configuring Plans	18
Managing Resellers	21
Managing Sites	25
Managing SiteBuilder Components	31
Skins	32
Templates	34
Language Packages	36
Modules	38
Integrating with Plesk Accounts	40
Creating SB Resellers for Plesk Domain Administrator Accounts	41
Creating SB Sites for Plesk Domains	44

Preface

In This Chapter

About Remote Admin for SiteBuilder 2	4
Documentation Conventions	4
Typographical Conventions	5
Feedback	6

About Remote Admin for SiteBuilder 2

Remote Admin for SiteBuilder v. 2.0, also referred to as the Module or SBM, is an application integrated with the Plesk control panel. It allows the Plesk administrator to manage the SiteBuilder application (also SB) installed on either a remote or local server. This module has been specifically designed for web hosting administrators who can manage a SiteBuilder installation directly from the Plesk control panel being logged under the account of a Plesk administrator. The module connects to the SiteBuilder 2 application and applies all changes made through the module interface directly to the SiteBuilder database.

The Module is completely integrated with Plesk, which means that the administrator can create sites and resellers in SiteBuilder for Plesk domains and domain administrators. The Plesk administrator can create sites and reseller accounts by exporting them to the SiteBuilder database.

This document describes how to work with the Remote Admin for SiteBuilder 2 module. However, it does not cover the full SiteBuilder functionality. If you have questions related to the functionality and use of the SiteBuilder application, please refer to the SiteBuilder documentation set.

Documentation Conventions

Before you start using this guide, it is important to understand the documentation conventions used in it.

Typographical Conventions

The following kinds of formatting in the text identify special information.

Formatting convention	Type of Information	Example
Special Bold	Items you must select, such as menu options, command buttons, or items in a list.	Go to the QoS tab.
	Titles of chapters, sections, and subsections.	Read the Basic Administration chapter.
<i>Italics</i>	Used to emphasize the importance of a point, to introduce a term or to designate a command line placeholder, which is to be replaced with a real name or value.	The system supports the so called <i>wildcard character</i> search.
Monospace	The names of commands, files, and directories.	The license file is located in the <code>httpdocs/common/licenses</code> directory.
Preformatted	On-screen computer output in your command-line sessions; source code in XML, C++, or other programming languages.	<pre># ls -al /files total 14470</pre>
Preformatted Bold	What you type, contrasted with on-screen computer output.	<pre># cd /root/rpms/php</pre>
CAPITALS	Names of keys on the keyboard.	SHIFT, CTRL, ALT
KEY+KEY	Key combinations for which the user must press and hold down one key and then press another.	CTRL+P, ALT+F4

Feedback

If you spot a typo in this guide, or if you have thought of a way to make this guide better, we would love to hear from you!

If you have a suggestion for improving the documentation (or any other relevant comments), try to be as specific as possible when formulating it. If you have found an error, please include the chapter/section/subsection name and some of the surrounding text so that we could find it easily.

Please submit a report by e-mail to userdocs@swsoft.com.

CHAPTER 2

Installing Remote Admin for SiteBuilder2

This chapter describes how to install the Remote Admin for SiteBuilder 2 Module on the server where Plesk is installed.

In This Chapter

System Requirements	7
Install Module	8

System Requirements

For normal operation of the module, your server must meet the following hardware and software requirements:

- Plesk 7.5.3 or higher and all Plesk-related components (refer to the Plesk Installation Guide for the list of Plesk-related components)
- 3 MB available disk space
- One of the operating systems supported by the current Plesk version

Install Module

You can install module using one of the two methods:

- using the module management feature available in the Plesk control panel
- from the command line

➤ *To install the module from the Plesk control panel:*

- 1 In the Plesk navigation pane, click **Modules**.
- 2 Under **Tools**, click **Manage Modules** and, on the next page, select **Add Module**.
- 3 On the **Upload New Module** page, enter the path to the module package file or use **Browse...** to locate the file. The module package should have either the `.rpm` or `.sh` extensions.

Note: For some operating systems, the package can have other extensions, for example, `.deb` for Debian OS.

- 4 Click **OK**. The package will be extracted and installed to the proper location. After installation, the module appears as the **Remote Admin for SiteBuilder 2** custom button on the **Modules** page.

➤ *To install the module from the command line:*

To run installation from the `.sh` package:

1. Make the shell script executable using the `chmod` command.
2. Run the shell script.

To install from the `.rpm` package:

1. Run the `.rpm` package using the `rpm - U hv * .rpm` command.

To install from the `.deb` package (for Debian OS):

1. Run the `.deb` package using the `dpkg - i * .deb` command

During installation, the application searches for a local SiteBuilder installation and if it finds the SiteBuilder application on the same server as Plesk, it automatically modifies the DNS record to `sitebuilder.hostname`, where `hostname` is the full name of your host.

If a local SiteBuilder instance is found on the same server, the module will connect to it automatically and you will not have to manually type the local SiteBuilder address to log in to the application.

After installation, the module adds its tables to the Plesk database. Advanced can check that these tables have been created. The following tables are added:

```
module_2_sbm_config
module_2_sbm_domains
module_2_sbm_resellers
module_2_sbm_sbservers
```

CHAPTER 3

Getting Started with Module

This chapter describes your first steps with the Remote Admin for SiteBuilder v. 2.0 module.

In This Chapter

Connecting to Remote SiteBuilder.....	9
Logging into Module	10
Adjusting SiteBuilder Preferences	12

Connecting to Remote SiteBuilder

After you have installed the Remote Admin for SiteBuilder v.2.0 module on your Plesk server, you should connect to the SiteBuilder application, which can be installed either on a remote server or on the same server where Plesk is installed.

To establish connection with the SiteBuilder application:

- 1 In the Plesk navigation pane, click **Modules**.
- 2 Click the **Remote Admin for SiteBuilder 2** module icon to open the SBM main page.
- 3 In the **SiteBuilder server address** field, specify the address of the server where SiteBuilder is installed. You can type the address as `http://sitebuilder.yourdomain.com/remote_admin`

If SiteBuilder is installed on the same server as Plesk, the address must be automatically added to the SiteBuilder address field, because the module searches for a local SiteBuilder instance during installation. If the address is not found, you can click **Check for local Site Builder installation** and the server address will be automatically added to the **SiteBuilder server address** field. You can also use this button to check for the local installation if, for example, the SiteBuilder application was installed later than the module was installed.

To connect to another server with the installed the SiteBuilder application, enter repeat the steps above. The Module will connect to another server if you have specified valid administrator's login and password for the SiteBuilder application on another server.

- 4 In the **Username** and **Password** fields, enter the administrator's login and password for the SiteBuilder application you have specified in the field above.
- 5 Click **Apply**.

Logging into Module

To start working with Remote Admin for SiteBuilder v.2.0, you should log in to the module.

The following users can log into the Module:

- Administrators
- SiteBuilder resellers (these can be Plesk domain owners if access to SBM is allowed for them (see the Creating SB Resellers (on page 41) section)

If you are the SiteBuilder administrator:

- 1 Access the Remote Admin for SiteBuilder2 Module (click **Modules** --> **Remote Admin for SiteBuilder 2**).
- 2 On the SBM main page, the Username and Password fields are prefilled with the administrator's login and password for the specified SiteBuilder instance. You do not need to change them unless they have been changed through the SiteBuilder application interface. The figure below shows the SBM main page for the user logged under the administrator account.

Figure 1: SBM main page (if logged as the administrator)

To log in as a reseller to the SiteBuilder module:

Important: You can access the Module only if it is allowed by the SiteBuilder administrator. See the Creating SB Resellers (on page 41) section for details on how to provide access to SiteBuilder for Plesk domain owners.

- 1 To access the Remote Admin for SiteBuilder 2 module, click the **Remote Administration for SiteBuilder** custom button on the Management page of your domain. This custom button is automatically created if the owner of a domain is allowed to access the Remote Administration module.
- 2 The SBM main page opens. The **Username** and **Password** fields already contain your reseller's login and password. There is no need to change them unless you want to quit the current session and log under another account.

Modules >

Remote Admin for SiteBuilder2 Up Level

Functions

Preferences Allowed hosts Site management Plan management Domains Administrators

SiteBuilder address

SiteBuilder server address with 'remote_admin'

Username

Password

[Check for local SiteBuilder2 installation](#)

Status

Accessing SiteBuilder2 located at:

Figure 2: SBM main page (if logged as a reseller)

Note: Changing the username and password on the SBM main page only switches the current user session. You can change the logins and passwords for administrators and resellers on the Preferences page. See the Setting Up Preferences (on page 12) section on how change user account credentials.

Adjusting SiteBuilder Preferences


Through the module interface you can change the following preferences for the account under which you are now logged into the module:

- Language
- Skin
- Login and password

These preferences will be changed in the SiteBuilder database.

To edit preferences:

- 1 On the SBM Module Management page, click  Preferences.

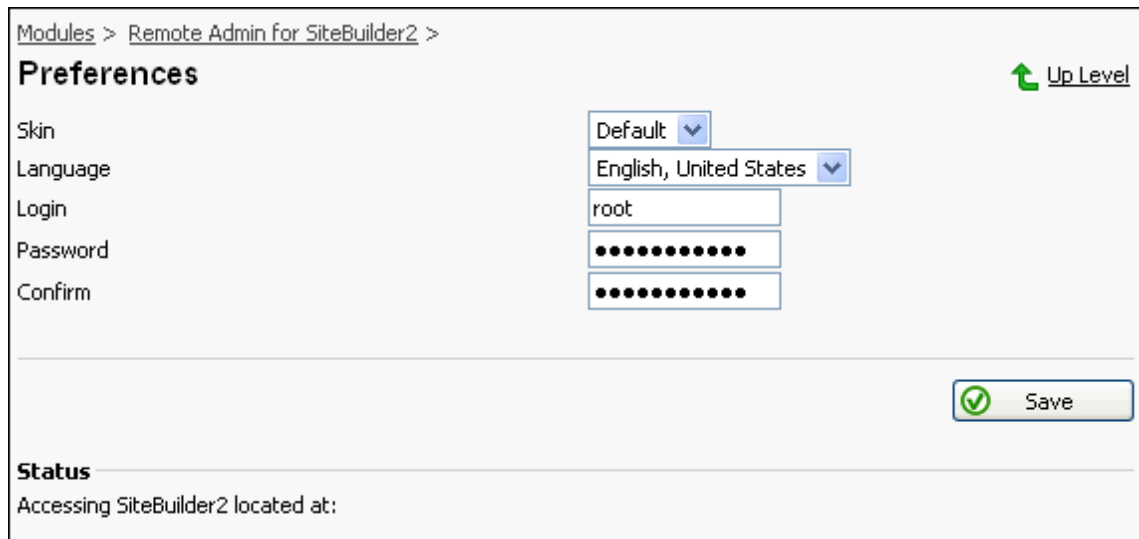

Modules > Remote Admin for SiteBuilder2 >

Preferences [Up Level](#)

Skin: Default

Language: English, United States

Login: root

Password:

Confirm:

Status

Accessing SiteBuilder2 located at:

Figure 3: Preferences page

- 2 From the **Skin** drop-down list, select the skin for the SiteBuilder interface. The skins available for selection are those activated on the Skin Management page (see the Skins (on page 32) section of the Managing SiteBuilder Components chapter).
- 3 From the **Language** drop-down list on the Preferences page, select the SiteBuilder language for the account you are currently logged (administrator or SB reseller).

The languages available for selection in this drop-down list are those activated on the Language Management page (see the Language Packages (on page 36) section of the Managing SiteBuilder Components chapter).

- 4 To change the login and password for the account you are currently logged, enter the new login and password in the fields provided. Confirm the new password.

For example, if you are logged under the SiteBuilder administrator account, you can change the administrator's login and password. The new login and password will be recorded in the SiteBuilder database. Next time, you will log in to the module and authorize in the SiteBuilder application using the new account credentials.

5 Click Save.

CHAPTER 4

Administering SiteBuilder

Remote Admin for SiteBuilder v. 2.0 allows the Plesk administrator and resellers to manage web sites, reseller accounts, site plans, and publication settings directly from the Plesk control panel, without accessing the SiteBuilder administration panel.

Using the Module, you can perform almost the same administrative tasks as if you were working through the SiteBuilder administration panel. The sections below explain how to manage hosts allowed for site publishing, reseller accounts, site plans, and sites through the Plesk-integrated Remote Admin for SiteBuilder 2 module. For detailed information on how to manage the key SiteBuilder elements, such as plans, sites, reseller accounts, and allowed hosts, please refer to the SiteBuilder user documentation.




In This Chapter

Adding Allowed Hosts.....	15
Configuring Plans	18
Managing Resellers.....	21
Managing Sites.....	25

Adding Allowed Hosts

To allow SiteBuilder users to publish their web sites, you should define the hosts to which publishing is allowed. These hosts are called '*allowed hosts*' because sites created using the SiteBuilder Wizard can be published only to the specified hosts. All hosts to which publishing is allowed must be added to the general list of allowed hosts in the SiteBuilder database. Then, allowed hosts included into the general list should be assigned to particular business plans, sites, and reseller accounts. For sites and resellers, allowed hosts are defined during creation or editing plans and reseller account properties (about this, see the Managing Resellers (on page 21) and Managing Sites (on page 25) sections). This section describes how to add allowed hosts to the SiteBuilder database through the Remote Admin for SiteBuilder 2 module interface.

To manage allowed hosts and view the list of allowed hosts/IP ranges:

- 1 On the SBM main page, click  Allowed Hosts.
- 2 On the Allowed Hosts management page, view the list of all hosts to which publishing is allowed. This list is retrieved from the SiteBuilder administration panel. All allowed hosts are organized in a list with the following columns:
 - (S)tatus - Status of the host/range of IP addresses.
 -  - The allowed host/IP range is deactivated. Publishing to this host/IP addresses is disabled. Click this icon to allow publishing sites to this host / IP range.
 -  - The allowed host/IP range is activated. Publishing to this host / IP address is allowed. Click this icon to prohibit publishing to this host / IP range.
 - Range - This column can contain the following values: '+' which denotes a range of IP hosts and '-' standing for a single host.
 - Host name - Name of the host or the range of IP addresses. Click the host name in this column to edit the name.
 - IP Address - Host IP address or the range of IP addresses
 - Owner - The account under which this host was added
 - Resellers - Number of resellers who have this host among their allowed hosts

Modules > Remote Admin for SiteBuilder2 >

Allowed hosts [Up Level](#)

Search by Host Name [Search](#) [Show All](#) [Add Host](#) [Add Range](#)

N	<input type="checkbox"/>	Status	Range	Host Name	Ip Address	Owner	Resellers
1	<input type="checkbox"/>	A	-	nickdomain.com	xxx.xxx.xx.xxx	root	none
2	<input type="checkbox"/>	A	-	sitebuilder.domain.com	333.333.22.11	root	none
3	<input type="checkbox"/>	A	-	testdomain.com	222.222.22.222	root	none
4	<input type="checkbox"/>	A	-	mynewdomain.com	111.111.11.111	root	1
							none

A - Access allowed, D - Access denied

[Activate](#) [Deactivate](#) [Delete](#) Number of entries per page [5](#) [10](#) [15](#) 1-4 of 4 total 1 [last](#)

Figure 4: Allowed Hosts Management page

To add new hosts to the SiteBuilder database:

- To add either a single host or a range of IP addresses, do one of the following:
 - To add a single host, click **Add Host**.
 - To add a range of IP addresses, click **Add Range**.
- On the next page, specify the host name, for example `mydomain.com`, a single IP address, or the range of IP addresses. Select the **Active** check box if you want this host or IP range to be activated immediately after it is added.
- Click **Save**.

To edit the host name or the range of IP addresses:

- Click the name of the host or the range of IP addresses in the **Host Name** column.
- On the next page, type the new host name or the new values for IP addresses.
- Click **Save**. The new values will be applied.

To activate / deactivate hosts:

- Select the check box corresponding to the host you want to activate/deactivate. You can select several hosts at once.
- Click one of the following buttons below the list:
 - Activate** - to make deactivated host(s) active. Active hosts can be then added to site plans and assigned to reseller accounts.
 - Deactivate** - to deactivate active hosts. The host will be deactivated and publishing to this host will be unavailable. However, this host will remain in the database so that you can activate it later.

To delete a host or several hosts from the SiteBuilder database:

- 1 Select the check box corresponding to the host you want to delete. You can select several hosts at once.
- 2 Click Delete.
- 3 In the confirmation dialog box, confirm the operation and click OK. The selected hosts will be deleted from the SiteBuilder database and from all plans and reseller accounts where it was used.

Note: When deleting or deactivating a host, make sure that the plans and reseller accounts that used this host have other hosts allowed for publishing sites. If you delete one host, publishing sites will be automatically redirected to the remaining hosts. If there are no other hosts assigned to a plan or reseller, publishing will be impossible after the last host is deleted.

Configuring Plans

In SiteBuilder, *plan* is a set of limits, modules, templates, and allowed hosts applied to web sites created using SiteBuilder.

Plans can be of the following types:




- *Template Plan* - A template plan is created by the administrator on the Plan Management page, for example, Standard_Client plan. This plan will serve as a template for the plans for individual sites.
- *Inherited Plan* or *Site Plan* - After a template plan is applied to a particular web site, all limits and components included into the template plan are copied to the plan for this web site. Such site plan is called *Inherited Plan*, because it inherits all the settings of the Template Plan. The administrator or reseller can change the settings of inherited plans at any time, because these change will not affect the template plan. Inherited plan settings can be viewed and edited only on the Site Management page when you perform management operations on particular sites.
- *Base Plan* - An automatically created plan that includes a basic set of web site components. This plan is meant to be a safeguard against the situations when the template plan for trial sites gets corrupted for some reasons. In this case, the corrupted plan will be automatically replaced by the Base Plan. The Base Plan cannot be removed or deactivated.

Note:

- There are two types of sites in SiteBuilder: *trial sites* and *regular sites*. Trial sites are created by users who use SiteBuilder for the first time. These sites cannot be published. Regular sites are fully-functional sites that can be published. The SiteBuilder administrator must update sites from trial to regular.

Only one plan can be used for trial sites. By default, the Base Plan is automatically set as the plan for trial sites. This plan is automatically applied to all trial sites and cannot be removed or deactivated.

To access plan management options and view a list of plans:

- 1 On the SBM main page, click  Plan Management.
- 2 On the Plan Management page, you can see all plans available in SiteBuilder. This list is retrieved from the SiteBuilder administration panel. All plans are organized in a list with the following columns:
 - (S)tatus - Current status of a plan.
 -  - The plan is deactivated. Deactivated plans cannot be applied to web sites. They also are not available for selection. Click this icon to allow using this plan for sites.
 -  - The plan is activated. Activated plans can be applied to any type of web sites. Click this icon to deactivate this plan.

Note: If you deactivate a Template Plan, this does not affect the way inherited plans are applied, because all settings of the parent Template Plan have already been copied to its inherited plans.

- Name - Name of the plan. Click the plan name to edit the plan configuration.

- For trial sites - This column shows whether a plan is applied to trial sites. The following values are possible: **Yes** - the plan is applied to trial sites, **No** - the plan is not used for trial sites. Click this value to change the plan from trial to regular or vice versa.
- Description - Additional information about the plan.
- Owner - The account under which this plan was added

Modules > Remote Admin for SiteBuilder2 >

Plan management Up Level

Search by Name [Search](#) [Show All](#) [Add Plan](#)

N	<input type="checkbox"/>	Status	Name	For trial sites	Description	Owner
1	<input type="checkbox"/>	A	BasePlan	no	Base Plan	root
2	<input type="checkbox"/>	A	BasePlan_micro	yes	Base Plan for micro (reseller)	micro
3	<input type="checkbox"/>	A	BasePlan_mn	yes	Base Plan for mn (reseller)	mn
4	<input type="checkbox"/>	A	BasePlan_ss	yes	Base Plan for ss (reseller)	ss
5	<input type="checkbox"/>	A	Standard_Client	no		root

A - Access allowed, D - Access denied

[Activate](#) [Deactivate](#) [Delete](#) Number of entries per page [5](#) [10](#) [15](#) 1-5 of 5 total [1](#) [last](#)

Figure 5: Plan Management page

To add and configure a plan for regular sites:

- 1 On the Plan Management page, click **Add plan** above the list to create a plan.
- 2 On the General tab, specify the following general parameters of the new plan:
 - Name - Name of the plan
 - Description - Arbitrary description of the plan
 - Pages number - Maximum number of pages allowed for the web sites based on this plan
 - Apply changes to all inherited plans - Select this check box if you want to apply all changes to the inherited plans

Modules > Remote Admin for SiteBuilder2 >

Plan management Up Level

General Hosts Modules Templates

Name

Description

Pages number

Apply changes to all inherited plans

Status

Accessing SiteBuilder2 located at:

Figure 6: Adding a plan

- 3** Click the **Hosts** tab to define hosts to which sites that are based on this plan can be published. From the general list of allowed hosts, select the hosts to which the sites based on this plan can be published. Click **Add to plan**. A 'plus' sign appears in the **In plan** column if a host is included in the plan.
- 4** On the **Modules** tab, specify the modules included in the plan. The modules listed on this tab are only those activated on the **Module Management** page (see the **Modules** (on page 38) section). Using the check boxes, select the modules you want to make available for the sites based on this plan. Click **Add to plan**. A 'plus' sign appears in the **In plan** column if a module is included in the plan.
- 5** On the **Templates** tab, select the templates included in the plan. The templates listed on this tab are only those activated on the **Template Management** page (see the **Templates** (on page 34) section). Using the check boxes, select the templates you want to make available for the sites based on this plan. Click **Add to plan**. A 'plus' sign appears in the **In plan** column if a template is included in the plan.
- 6** Click **Save**. The new plan for regular sites will be added.

To edit plan properties:

- 1** On the **Plan Management** page, click the name of the plan you want to change in the **Name** column.
- 2** Edit the plan properties you have specified during creation of this plan. On the **General** tab, select the **Apply changes to all inherited plans** check box to apply your changes to all inherited plans. If this check box is cleared, all changed will be applied only to the plan you are editing.
- 3** Click **Save**. Changes will be immediately applied to

To apply a plan to trial sites (i.e., change it from regular to trial):

Note: Only one plan, which must be a **Template Plan**, can be selected for trial sites! Plans for resellers cannot be set as plans for trial sites.

In the list of plans on the **Plan Management** page, click the **No** value in the **For trial sites** column. The settings of the selected plan will be immediately applied to all trial sites.

Managing Resellers

In SiteBuilder, *resellers* are subadministrators who can perform a variety of management operations on business plans, sites, and allowed hosts. For example, a reseller can change business plans, define page limits and allowed hosts for the sites assigned to his/her account. They cannot manage the sites that belong to other resellers or are non-assigned to any other reseller. Resellers can also create sites in SiteBuilder for Plesk domains (**Domain Administrators** option). For more information on the functionality available for resellers, refer to the SiteBuilder user documentation.

This section describes how the Plesk administrator logged under the SiteBuilder administrator account can manage reseller accounts through the Remote Administration Module interface.

When you create a reseller account, the SiteBuilder Remote Administration Module performs the following operations:

- *Creates a reseller account* in the SiteBuilder administration panel. Resellers can log in to the SiteBuilder application using the login and password for this account.
You can manage this reseller account either through the module interface (SBM management page --> **Resellers**) or from the SiteBuilder administration panel (click the **Resellers** button).
- *Creates a copy of the plan* selected for the new reseller. The plan named as `<selected_plan_name>_<reseller_login>` will be applied to all sites that belong to this reseller.

To create and configure a reseller account:

- 1 On the SBM main page, click **Resellers**.
- 2 On the Resellers page, click **Add Reseller**.
- 3 On the **General** tab, specify the following parameters for the new reseller account (the fields marked with an asterisk are mandatory):
 - **Domain** - name of the domain belonging to the new reseller
 - **E-mail** - E-mail address of the reseller. This address will be used to send notification messages and other information.
 - **Name** - Reseller's name
 - **Login** - Reseller's login to authorize in the SiteBuilder application or SBM.
 - **Password** - Password used in combination with the login to authorize in SiteBuilder or SBM. Confirm this password in the next field.
 - **Language** - Language for the SiteBuilder interface. The drop-down options are the language packs activated on the Language Pack Management page (see Language Packages (on page 36)).
 - **Skin** - Skin for the SiteBuilder interface. The drop-down options are the skins activated on the Skin Management page (see Skins (on page 32)).

Modules > Remote Admin for SiteBuilder2 >

Resellers

[Up Level](#)

General Sites Hosts Plans

* Domain

* Email

* Name

* Login

* Password

* Confirm password

Language

Skin

Figure 7: Adding a reseller account. Specifying general information

- 4 If you want to associate existing sites with this reseller account, open the Sites tab. On this tab, you can view all sites created through the SiteBuilder Wizard. To assign a site to the reseller account, select the check box corresponding to the target site and click **Add to list**. A 'plus' sign appears in the **In list** column if the site is added to this reseller account.

Modules > Remote Admin for SiteBuilder2 >

Resellers

[Up Level](#)

General Sites Hosts Plans

Search by Status

N	<input type="checkbox"/>	In list	Status	Site Alias	Publish	Type	Reseller	Creation Date	Expiration Date
1	<input type="checkbox"/>	-	A	57f42d63755	n/a	Trial	root	July 14, 2005	August 13, 2005
2	<input type="checkbox"/>	-	A	5e342d74357	n/a	Trial	root	July 15, 2005	August 14, 2005
3	<input type="checkbox"/>	-	A	5e342d74517	n/a	Trial	root	July 15, 2005	August 14, 2005
4	<input type="checkbox"/>	-	D	test	-	Regular	root	July 13, 2005	-

[Add to list](#) [Remove from list](#) Number of entries per page [5](#) [10](#) [15](#) 1-4 of 4 total [1](#) [last](#)

Figure 8: Adding a reseller account. Specifying sites

- 5 Click the **Hosts** tab to define hosts to which publishing is allowed for the sites that belong to this reseller. From the general list of allowed hosts, select the hosts to which the sites of this reseller can be published. Use the check boxes to select hosts. Click **Add to list**. A 'plus' sign appears in the **In list** column if the sites of this reseller can be published to the specified host.

- Open the **Plans** tab to define the business plans that will be applied to the sites belonging to this reseller. Select a plan from the list of business plans and click **Add to list**. A 'plus' sign appears in the **In list** column if the business plan can be applied to the sites of this reseller.

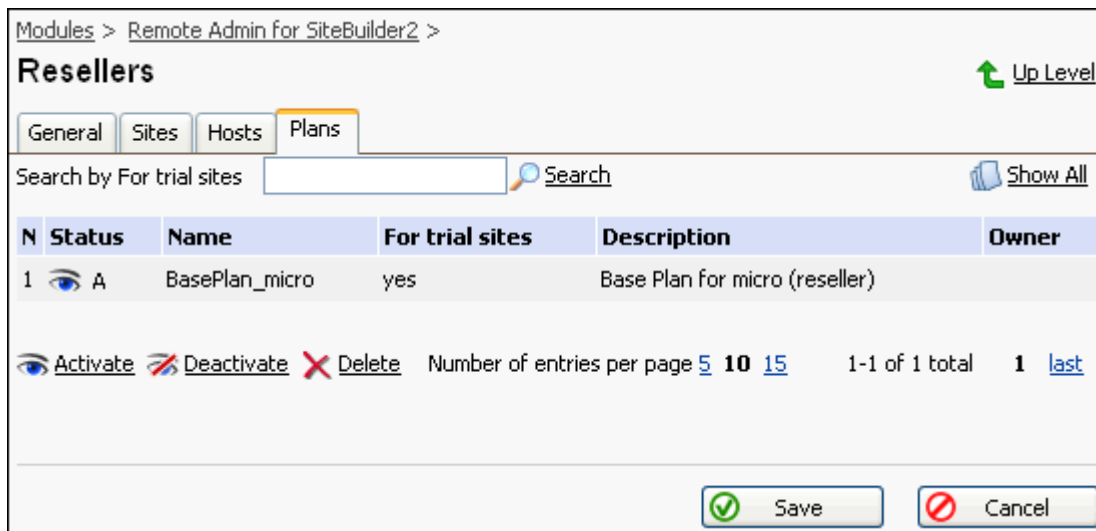


Figure 9: Adding a reseller account. Selecting plans

- Click **Save**. The new reseller account will be added to the list of resellers and to the SiteBuilder database. Please, send the login and password to the reseller so that he/she could log in to the SiteBuilder application and the SiteBuilder RA module.

On the Resellers management page you can see a list of all resellers existing in the SiteBuilder database, irrespective from where they were created, either from the SiteBuilder administration panel or through the SiteBuilder RA module.



Figure 10: Resellers Management page

To edit reseller account properties:

Click the reseller login in the **Login** column and edit the parameters you have specified during creation of the reseller account.

To remove a reseller account from the SiteBuilder database:

- 1** In the list of resellers, select the check box corresponding to the account you want to delete.
- 2** Click **Delete**.
- 3** Confirm the operation and click **OK**. The reseller account will be removed from the SiteBuilder database. All sites associated with this reseller account will remain non-assigned to any other reseller and will be transferred to the root owner.




Managing Sites

There are two types of sites in SiteBuilder:

- A *trial site* is a site with limited functionality that cannot be published. Trial sites are created by users who use SiteBuilder for the first time. By default, the lifetime for trial sites is 30 days. If a trial web site is not transferred to a regular one after the lifetime period, the trial site is automatically removed from the database.
- A *regular site* is a site with full functionality that can be published.

With the Remote Admin for SiteBuilder 2 module, you can perform a variety of management operations on sites, such as add new trial and regular sites to the SiteBuilder administration panel, edit plans for sites, activate or deactivate them, delete selected sites from the SiteBuilder database, and transfer trial sites to regular ones.

To access site management functions and view a list of sites:

- 1 Click  Site Management on the SBM main page.
- 2 The Site Management page opens, where you can see a list of sites retrieved from the SiteBuilder administration panel. The sites are organized in a list with the following columns:
 - (S)tatus - Status of the site.
 -  - The site is deactivated, which means that users cannot edit this site using the SiteBuilder Wizard. Click this icon to allow the user to edit this site.
 -  - The site is activated, i.e. users can edit the content of this site using the SiteBuilder Wizard. Click this icon to deactivate the site.
 - Site Alias (or Site Identity) - Site name, which is also used as a login to the SiteBuilder Wizard to edit this site.
 - Publish - The value in this column indicates whether the site can be published. The following values are possible: n/a means that this site is a trial site that cannot be published, '-' indicates that this site is regular but publishing is not allowed, and '+' shows that this site can be published.
 - Type - Site type, which can be either trial or regular.
 - Reseller - The reseller account this site is associated with.
 - Creation Date - Date when this site was created.
 - Expiration Date - Date when the storage period for the site expires. This parameter is for trial sites only because trial sites can be stored only for a specified number of days.

Modules > Remote Admin for SiteBuilder2 >

Site management

Search by Site Alias [Search](#) [Show All](#)

N	<input type="checkbox"/>	Status	Site Alias	Publish	Type	Reseller	Creation Date
1	<input type="checkbox"/>	A	25f42cb9b41	n/a	Trial	root	July 6, 2005
2	<input type="checkbox"/>	A	25f42cb9c2c	n/a	Trial	root	July 6, 2005
3	<input type="checkbox"/>	A	25f42cba212	n/a	Trial	root	July 6, 2005
4	<input type="checkbox"/>	D	offafaf	0	Regular	root	July 7, 2005
5	<input type="checkbox"/>	A	my	0	Regular	root	July 6, 2005
6	<input type="checkbox"/>	A	site0	0	Regular	root	July 7, 2005
7	<input type="checkbox"/>	D	uuuvuyvuvu	0	Regular	root	July 7, 2005

A - Access allowed, D - Access denied

[Activate](#) [Deactivate](#) [Delete](#) [Trial to Regular](#) [Deny publish](#) [Allow publish](#) Number of entries per page [5](#) [10](#) [1](#)

Figure 11: Site Management page

To add a trial site:

- 1 On the Site Management page, click the **Add trial site** button above the list (you may need to scroll the screen horizontally to see this button).
- 2 On General Properties tab, specify the following parameters for the new trial site:
 - **Site Alias** - Name for the new site that will be used as a login for users to edit the web site content.
 - **Active** - Select this check box if you want the new trial site to be activated after it is added.
 - **Plan** - A plan enabled for trial sites on the Plan Management page is displayed in this drop-down list. You cannot change the plan for trial sites unless it is changed on the Plan Management page (see the Configuring Plans (on page 18) section).
 - **Language** - Select the language for the SiteBuilder Wizard interface for users who will edit the content of this site.
 - **Reseller** - From this drop-down list, select a reseller this site will be assigned to.
 - **Password** - Specify a password that will be used in combination with the **Site Alias** to authorize a user who will edit this site using the SiteBuilder Wizard. Confirm the password in the next field.

Modules > Remote Admin for SiteBuilder2 >

Site management Up Level

General Properties Informational Email

* Site Alias

Active

* Plan BasePlan ▾

* Language English, United States ▾

Reseller micro - (micro) ▾

Password

Confirm password

Figure 12: Adding a trial site. Specifying general properties

- 3 Click the **Informational Email** tab to specify email settings for sending information about the new site:
 - **Send site information to email** - Select this check box to send information about this site to the customer's email address.
 - **Email** - Specify the customer's email address in this field. If the check box above is selected, the site alias and password will be sent to the specified user's address.
- 4 Click **Save**. The new trial site will be added.

To transfer a trial site to a regular one:

- 1 On the **Site Management** page, select one of several sites using check boxes on the left.
- 2 Click **Trial to Regular** at the bottom of the list. The selected sites change their type to regular. Now you can adjust their publishing properties, assign them to resellers, and select business plans for regular sites.

To add a regular site, do one of the following:

- Transfer a site from trial to regular as described above.
- On the **Site Management** page, click the **Add regular site** button above the list of sites. On the next page, specify the parameters (publishing settings, reseller, plan, etc.) for the regular site. The parameters are the same as during editing regular sites.

To edit properties of a regular site:

- 1 On the **Site Management** page, click the name of a regular site in the list.
- 2 On the **General Properties** tab, edit the parameters of this regular site. The parameters are the same you specified when added a trial site. The only difference is that now you can select any plan available for regular sites. On this page, you can select a template plan for the regular site and then change the plan settings for this particular site on the **Plan Management** tab (see below).

Note: When a regular site is created, a copy of the selected Template Plan (the so-called **Plan revision** or **Inherited Plan**) is created for this site. This means that any plan changes for a specific site will not affect the parent Template Plan. In the module interfaces, inherited plans are called Plan Revisions.

3 On the **Publish Properties** tab, set the publishing properties for this site:

- **Allow publishing sites** - Select this check box to allow publication of this site. If the check box is cleared, this site cannot be published on the web.
- **Site Host Name** - Name of the host where this site will be published.
- **Mode** - From this drop-down list, select the publication mode: FTP or VPS. FTP, which stands for File Transfer Protocol, is an easy way to transfer files to and from a remote server. VPS standing for Virtual Private Server technology is a method of emulating several servers running on one physical server.

If you select the FTP mode, specify the following FTP settings required to establish connection with a remote server and transfer files:

FTP Host - From the drop-down list, select the name of the FTP host where to transfer files. This list is populated from the list of activated allowed hosts included in the plan associated with this site (to manage hosts, click **Plan Management -- > Hosts**).

FTP Login and **FTP Password** - FTP user login and password used to authorize FTP transactions.

FTP Work Directory - The path to the directory where the web site files will be stored.

If you select the VPS publishing mode, specify the following VPS settings required to establish a connection with a VPS server:

VPS Domain - VPS domain name

VPS Service VE IP Address - IP address of the service machine

VPS Identifier - A unique 32-bit Virtual Private Server ID, also known as VPS ID

VPS Work Directory - the VPS work directory where site files will be stored

VPS Owner User and **VPS Owner Group** - parameters of the VPS owner.

The screenshot displays the 'Publish Properties' configuration window. At the top, there is a breadcrumb trail 'Modules > Remote Admin for SiteBuilder2 >' and an 'Up Level' button with a green arrow. Below this, there are four tabs: 'General Properties', 'Publish Properties' (which is selected and highlighted with an orange border), 'Informational Email', and 'Plan Properties'. The 'Publish Properties' tab contains the following fields:

- 'Allow publishing sites': A checkbox that is currently unchecked.
- 'Site Host Name': A text input field.
- '* Mode': A dropdown menu with 'ftp' selected.
- '* FTP Host': A dropdown menu.
- '* FTP Login': A text input field.
- '* FTP Password': A text input field.
- '* FTP Work Directory': A text input field.

At the bottom right of the window, there are two buttons: a green 'Save' button and a red 'Cancel' button.

Figure 13: Adding a regular site. Specifying publishing properties

- 4 On the **Informational Email** tab, specify the settings for sending information about the new site:
 - **Send site information to email** - Select this check box to send information about this site to the customer's email address.
 - **Email** - Specify the customer's email address in this field. If the check box above is selected, the site alias and password will be sent to the specified user's address.
- 5 Click the **Plan Properties** tab to adjust the plan properties for this site. As noted above, a copy of the parent Template Plan is created for every site. Thus, a site plan inherits all parameters of the parent Template Plan. You can make changes to the plans of specific sites, and these changes will have no effect on the parent Template Plan. Therefore, if you want apply all settings of the template plan to a specific site, leave the site plan unchanged. If you want to edit the properties of a site plan, click the **Plan Properties** tab.

At the bottom of the **Site Properties** tab, you can see subtabs on which you can edit properties of this site plan. On the **General** subtab, you can view the parent plan for this site plan and the revision number (in the figure below, the parent plan is `Standard_Client` and the revision number is 0.0). Each time you edit the properties of the site plan, the revision number will increase by 0.1 (i.e., next time the revision number will be 0.1). On this subtab, you can change the number of pages allowed for this site. If you exceed the maximum number of pages allowed by the SiteBuilder license, an error message will be displayed.

The screenshot shows a web interface for editing site plan properties. At the top, the breadcrumb path is 'Modules > Remote Admin for SiteBuilder2 >'. There is an 'Up Level' link with a green arrow icon. Below this is a tabbed interface with four tabs: 'General Properties', 'Publish Properties', 'Informational Email', and 'Plan Properties'. The 'Plan Properties' tab is active and displays the following information:

Name	Standard_Client, Revision 0.0
Last revision date	2005-07-12
* Pages number	<input type="text" value="10"/>

Below the main form area, there are four subtabs: 'General', 'Hosts', 'Modules', and 'Templates'. At the bottom right of the interface, there are two buttons: 'Save' (with a green checkmark icon) and 'Cancel' (with a red 'X' icon).

Figure 14: Adding a regular site. Editing plan properties

Click the **Hosts** subtab to select the hosts to which this site can be published. The allowed hosts displayed on this subtab include only the hosts allowed for the parent Template plan. To add a host to the site plan, select it in the list and click **Add to Site Plan**. To remove a host from the site plan, select it in the list and click **Remove from Site Plan**.

Click the **Modules** subtab to define the modules available for this site. To add a module to the site plan, select it in the list and click **Add to Site Plan**. To remove a module from the site plan, select it in the list and click **Remove from Site Plan**.

Click the **Templates** subtab to specify the templates included in the site plan. To add a template to the site plan, select it in the list and click **Add to Site Plan**. To remove a template from the site plan, select it in the list and click **Remove from Site Plan**.

- 6 Click **Save**. The changes you have just made will be instantly applied to the site.

To allow publishing of a regular site:

- 1 On the **Site Management** page, select one or several sites for which you want to allow publishing.
- 2 Click **Allow Publish** to allow publishing these sites.

Note: By default, publishing is not available for regular sites. Therefore, you should allow publishing for the site as described above.

CHAPTER 5

Managing SiteBuilder Components

Through the SiteBuilder Remote Administration Module, you can manage the following interface and system settings for SiteBuilder:

- Skins
- Language packages
- Modules
- Templates

Through the Remote Administration for SiteBuilder Module, you can activate/deactivate and delete these components. Read the sections below for more information on how you can handle these components through the remote administration module.

Note: In the current version of SBM 2.0 you cannot download and install new templates, skins, and language packs on the SiteBuilder server.

In This Chapter

Skins.....	32
Templates	34
Language Packages	36
Modules.....	38

Skins

In computer terminology, *skins*, or themes of user interface, are custom graphical appearances used to change the look of software applications. The skins for SiteBuilder are included into the distribution package or you can create own custom skins and upload them to the SiteBuilder administrator's panel.

Through the Remote Admin for SiteBuilder interface, you can perform the following operations on SiteBuilder skins :

- View all skins installed on SiteBuilder
- Activate or deactivate selected skins
- Delete skins
- Search for specific skins by skin IDs.

Note: You cannot upload new skins to the SiteBuilder panel through the module interface. You can only handle existing skins. To upload a new skin, access the SiteBuilder administration panel and click **Skins**.


To *activate* a skin means to make a skin available for selection. *Deactivated* skins remain installed on SiteBuilder, but they cannot be selected as skins for the SiteBuilder interface. Therefore, to apply a skin, you must first activate it.




To activate/deactivate or delete a skin:




- 1 On the Module Management page, click  **Skins**. The Skin Management page opens.

Modules > Remote Admin for SiteBuilder2 >

Skins

Search by ID  Search

N	<input type="checkbox"/>	Status	ID	Caption
1	<input type="checkbox"/>	 A	default	Default
2	<input type="checkbox"/>	 A	green	Green
3	<input type="checkbox"/>	 A	metallic	Metallic

 [Activate](#)  [Deactivate](#)  [Delete](#) Number of entries per page [5](#) **10** [15](#) 1-3

Status

Accessing SiteBuilder2 located at:

Figure 15: Skin Management page

This page displays a list of skins installed on the SiteBuilder panel. You can view the status (activated, deactivated) and ID for each skin.

- 2 Select the check box corresponding to the skin you want to activate/deactivate. You can select several skins at once.
- 3 Click one of the following buttons below the list:
 - **Activate** - to make disabled skin(s) active. Active skins can be set as current skins for SiteBuilder.
 - **Deactivate** - to deactivate active skin(s).
 - **Delete** - to delete skin(s) from SiteBuilder.

Note: You cannot deactivate or delete the default skin. The default skin is the one labeled as "default" in the ID column. If you deactivate or delete a skin that is currently in use, the default skin will be used instead.

Templates

In SiteBuilder terminology, a *template* is a set of pre-designed text and graphics on which web sites can be based. Templates are usually created for specific topics, such as auto industry, medicine, biology, etc.


Through the SBM interface, you can perform the following operations on templates:

- View all templates installed on SiteBuilder
- Activate or deactivate selected templates
- Delete templates
- Search for specific templates by Template ID.

Note: You cannot upload new templates to the SiteBuilder panel through the module interface. You can only handle existing templates. To upload a new template, access the SiteBuilder administration panel and click **Templates**.

To *activate* a template means to allow users to build their web sites using this template. *Deactivated* templates remain installed on SiteBuilder, but they are hidden from SiteBuilder Wizard's users. Therefore, to allow users to based their web sites on a template, you should activate it.

To activate/deactivate or delete a template:

- 1 On the Module Management page, click  **Templates**. The Template Management page opens.

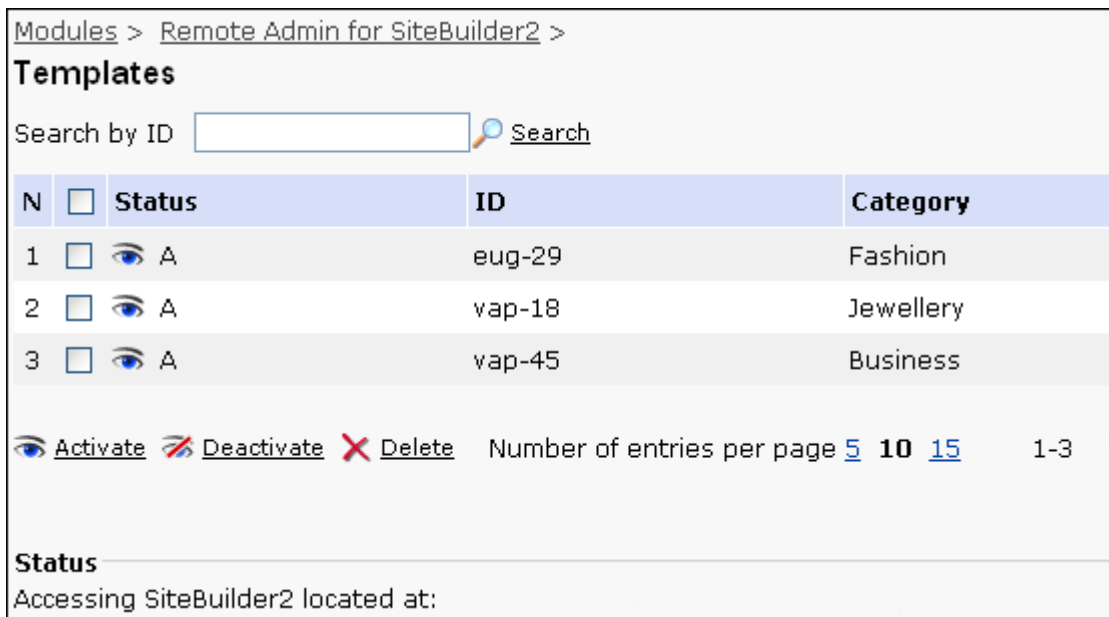


Figure 16: Template Management page

This page displays a list of templates installed on SiteBuilder. You can view the status (activated, deactivated), ID, and category for each template.

- 2 Select the check box corresponding to the template you want to activate/deactivate. You can select several templates at once.
- 3 Click one of the following buttons below the list:
 - **Activate** - to make disabled template(s) active. Active templates are available for SiteBuilder users.
 - **Deactivate** - to deactivate active template(s). Deactivated templates are hidden from SiteBuilder users and cannot be used for their web sites.
 - **Delete** - to delete template(s) from SiteBuilder.

Language Packages

Language packages, or locales, provide SiteBuilder user interface in other languages. Through the SBM interface, you can perform the following operations on language packages:

- View all locales installed on SiteBuilder
- Activate or deactivate selected packages
- Delete packages
- Search for specific locales by Language name.

Note: You cannot upload new locales to the SiteBuilder panel through the module interface. You can only handle existing language packages. To upload a new locale, access the SiteBuilder administration panel and click **Languages**.

To *activate* a language package means to allow users to select this package as a locale for the SiteBuilder interface. *Deactivated* packages remain installed on SiteBuilder, but they cannot be selected as interface languages.

To activate/deactivate or delete a language package:

- 1 On the Module Management page, click  **Languages**. The Language Management page opens.



Figure 17: Language Management page

This page displays a list of language packages installed on SiteBuilder. You can view the status (activated, deactivated), ID, and country for each locale.

- 2 Select the check box corresponding to the locale you want to activate/deactivate. You can select several locales at once.
- 3 Click one of the following buttons below the list:
 - **Activate** - to make disabled locale(s) active. Active locales can be set as the SiteBuilder interface language.

- **Deactivate** - to deactivate active language package(s).
- **Delete** - to delete locale(s) from SiteBuilder.

Note: You cannot deactivate or delete the default language package. The default locale for SiteBuilder is "en_US". If you deactivate or delete a locale that is currently in use, the default locale will be used instead.

Modules

Modules are applications that extend the functionality of HTML web pages created using SiteBuilder. Using modules, web site owners can make their Internet representations more attractive for visitors. For more information on SiteBuilder modules, refer to the SiteBuilder user documentation.


Through the SBM interface, you can do the following:

- View all modules installed on SiteBuilder
- Activate or deactivate selected modules
- Delete modules
- Search for specific modules by name.

To *activate* a module means to make it available for users who work in SiteBuilder wizard. Activated modules can be included in site plans; in this case, users working under these plans will be able to insert the modules on their web pages (see the Managing Plans (on page 18) section). *Deactivated* modules remain installed on SiteBuilder, but they cannot be added to plans. Therefore, you can add only active modules to plans.

To *activate/deactivate or delete a module*:

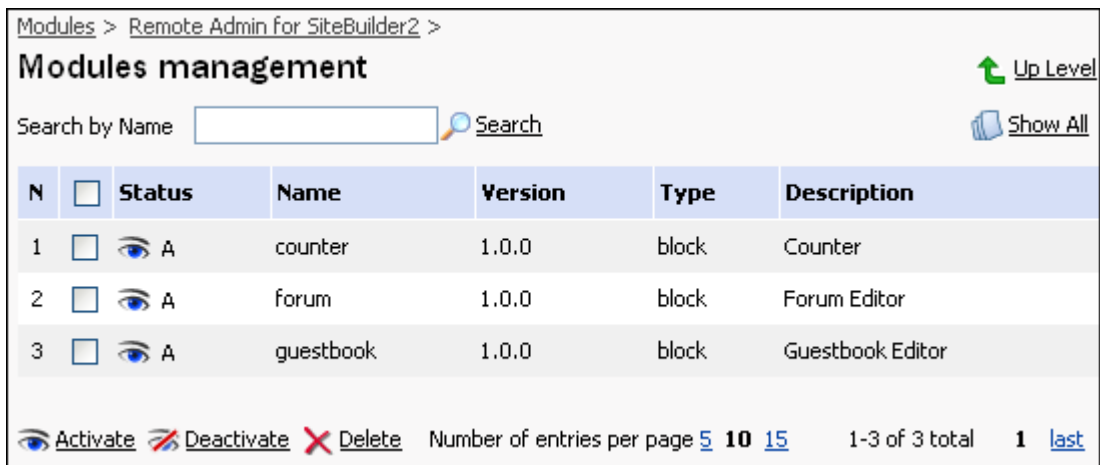


- 1 On the Module Management page, click  **Modules**. The Module Management page opens.



Modules > Remote Admin for SiteBuilder2 >

Modules management

Search by Name [Search](#) [Up Level](#) [Show All](#)

N	<input type="checkbox"/>	Status	Name	Version	Type	Description
1	<input type="checkbox"/>	 A	counter	1.0.0	block	Counter
2	<input type="checkbox"/>	 A	forum	1.0.0	block	Forum Editor
3	<input type="checkbox"/>	 A	guestbook	1.0.0	block	Guestbook Editor




 [Activate](#)  [Deactivate](#)  [Delete](#) Number of entries per page [5](#) [10](#) [15](#) 1-3 of 3 total [1](#) [last](#)

Figure 18: Module Management page

This page displays a list of modules currently installed on SiteBuilder. You can view the status (activated, deactivated), name, and description of each module.

- 2 Select the check box corresponding to the module you want to activate/deactivate. You can select several modules at once.
- 3 Click one of the following buttons below the list:
 - **Activate** - to make disabled module(s) active. Active modules can then be added to site plans.

- **Deactivate** - to deactivate active module(s).
- **Delete** - to delete module(s) from SiteBuilder.

Note: When you select **Delete**, the selected module(s) will be permanently removed from the SiteBuilder application. Modules can be installed again only from the command line. You cannot install modules through either SBM or the SiteBuilder administration panel.

CHAPTER 6

Integrating with Plesk Accounts

Using the Remote Admin for SiteBuilder 2 module, the Plesk administrator can create resellers and sites in the SiteBuilder administration panel using the existing accounts of Plesk domains and domain administrators.

In This Chapter

Creating SB Resellers for Plesk Domain Administrator Accounts	41
Creating SB Sites for Plesk Domains	44

Creating SB Resellers for Plesk Domain Administrator Accounts

In this version of the Remote Admin for SiteBuilder 2 module, the Plesk administrator can automatically create SiteBuilder reseller accounts for Plesk domain users (FTP users). Thus, the module will automatically create a reseller account in SiteBuilder with the FTP user login and password of the selected Plesk domain.

When you create a reseller account for a Plesk domain user, the Remote Admin for SiteBuilder 2 module performs the following operations:


- *Creates a SiteBuilder reseller account* for this domain. The reseller login is the FTP user login and the reseller password is the FTP user password for this domain.

Note: If the FTP user password was not set, no password will be assigned to the corresponding reseller account.



You can manage this reseller account either through the module interface (SBM main page -> Resellers) or from the SiteBuilder administration panel (click the Resellers button).

- *Creates the Remote Admin for SiteBuilder custom button* on the management page of this domain in Plesk. This custom button opens the Module page and the user is automatically logged under his/her reseller account. Through the Remote Admin for SiteBuilder 2, resellers can manage their sites, hosts, and plans.
- *Adds the target domain and all its subdomains to the list of allowed hosts* for the new reseller account.

To create a reseller account in the SiteBuilder application for a Plesk domain-level user (in Plesk terminology, a domain administrator):

- 1 On the SBM management page, click  Plesk Resellers.






The Plesk Resellers page displays all domains with physical hosting existing in the Plesk control panel. The Access column shows the status of each domain:

-  **D(isabled)** - the user of this Plesk-enabled domain cannot log into the SiteBuilder application under his/her reseller account
-  **A(llowed)** - this domain user can access the SiteBuilder application as a reseller

Modules > Remote Admin for SiteBuilder2 >

Plesk Resellers [Up Level](#)




Search by domain name [Search](#) [Show All Domains](#)

N	<input type="checkbox"/>	Access	Domain name (Reseller) ▲	Client	Company name
1	<input type="checkbox"/>	 D	yourdomain.com	My Domains	
2	<input type="checkbox"/>	 D	nickdomain.com	Nick	
3	<input type="checkbox"/>	 D	testdomain.com	My Domains	
4	<input type="checkbox"/>	 D	someone.domain.com	ssss	test
5	<input type="checkbox"/>	 A	mynewdomain.com	My Domains	

A - Access allowed, D - Access denied


[Allow Access](#) [Deny Access](#) Number of entries per page [5](#) [10](#) [15](#) 5 total 1


Figure 19: Plesk Resellers page

- 2 Using the check boxes, select one or several domains for which you want to create reseller accounts in the SiteBuilder application.
- 3 Click  **Allow Access** at the bottom of the list (or click the status icon in the **Access** column). The status icon for the domain changes to  **A(llowed)**. The reseller account is created for the selected domain.
- 4 To check that the reseller account has been created for the Plesk domain user:
 - Return to the SBM main page and click  **Resellers**. On the **Resellers** page, check that the domain name has appeared in the list of SB resellers. Click the name of the reseller you have just created in the list. On the **Hosts** tab, validate that this domain is specified as the allowed host for publishing sites of this reseller.
 - Open the management page for the target domain in the Plesk control panel. You can see the **Remote Admin for SiteBuilder** custom button on this page. Using this button, the domain user will access the SiteBuilder RA module under his/her reseller account.

After the reseller account is created, you can manage its settings through the module interface (see the Resellers (on page 21) section of the Managing Sites chapter).

To remove the reseller account created for the Plesk domain user:

- 1 On the SBM management page, click  **Plesk Resellers**.

- 2 In the list of domains with physical hosting, select one or several check boxes corresponding to the Plesk domains for which you want to delete the reseller account.
- 3 Click  Deny Access at the bottom of the list. The corresponding reseller account will be removed from the SiteBuilder application.

Note:

- If the some of the domain settings are changed in the Plesk control panel, such as FTP user login, password, or domain name, all these changes will be automatically applied on the SiteBuilder application side. You will not have to manually change anything through the SB Remote Administration module.
- Reseller accounts for Plesk domains can be created only for domains with physical hosting. Reseller accounts cannot be created for domains with other types of hosting, such as standard or frame forwarding.






Creating SB Sites for Plesk Domains



This version of Remote Admin for SiteBuilder 2 allows the Plesk administrator to create sites in the SiteBuilder application for existing Plesk domains. This means that Plesk domain users can create, edit the content, and publish their sites using the SiteBuilder Wizard, a powerful web site construction tool.

When you create a site in the SiteBuilder application for a Plesk domain/subdomain, the SiteBuilder Remote Administration Module performs the following operations:

- *Creates a site associated with the selected domain* in the SiteBuilder application. The Site Alias (site name or siteID) is automatically generated as `<ftp_username>_<domain(subdomain)>_site`. For example, your FTP user login is "nick" and your domain is mydomain.com, the site alias will be `nick_mydomain_com_site`. Site aliases are used to identify sites in the SiteBuilder database. Using your site alias as a login, you can start a session in the SiteBuilder Wizard to edit your web site content and publish it on the server.
- *Sets up publishing properties for your new site*. The publication mode is automatically set to FTP, the target Plesk domain is specified as an FTP host, and FTP user login and password are taken from the domain preferences in Plesk.
- *Create the SiteBuilder custom button* on the management page of this domain in Plesk. This custom button redirects the domain user to the SiteBuilder Wizard from where he/she can edit the website and publish it.
- *Adds the target domain as an allowed host* for publishing sites through SiteBuilder (see the Allowed Hosts (on page 15) section).



To create a site in the SiteBuilder application for a Plesk domain:

- 1 On the SBM main page, click  **Domain Administrators**.
The **Domain Administrators** page displays all domains and subdomains with physical hosting existing in the Plesk control panel. The **Access** column shows the status of each domain/subdomain:
 -  **D(isabled)** - the site for this domain has not been created in the SiteBuilder application
 -  **A(llowed)** - the site for this domain has been created in the SiteBuilder application
- 2 Using the check boxes, select one or several domains for which you want to create sites in the SiteBuilder application (the selected domains should have the **Disabled** status).
- 3 Click  **Allow Access** at the bottom of the list (or click the status icon in the **Access** column). The status icon for the domain changes to  **A(llowed)**. The site is created in the SiteBuilder application for the selected domain.
- 4 To validate that the site has been created for the Plesk domain (these steps are optional):

- Return to the SBM main page and click  **Site Management**. On the **Site Management** page, find your site in the list of all sites existing in the SiteBuilder database. Do not forget that the site alias (or site name) for your domain is `<ftp_username>_<domain(subdomain)>_site`. If there are a lot of sites in the list and it is difficult to find your site, use the **Search by Site Alias** option. Enter the site alias in the field and click **Search**. Refer to the **Administering Sites** (on page 25) section on how to manage sites through the module interface.
- Return to the SBM main page and click  **Allowed Hosts**. On the **Allowed Hosts** management page, check that the domain/subdomain for which you have created the site appeared in the list of allowed hosts.
- Open the management page for the domain/subdomain in the Plesk control panel. You should see the **SiteBuilder** custom button on this page. Using this button, the domain user will access the SiteBuilder Wizard to edit the site content and publish the new site to the hosting location.

After the site is created, you can manage its settings through the module interface (see the **Resellers** (on page 21) section of the **Managing Sites** chapter) or log into the SiteBuilder Wizard to edit its content.

To remove the site created for a Plesk domain:

- 1 On the SBM main page, click  **Domain Administrators**.
- 2 In the list of domains and subdomains, select one or several check boxes corresponding to the Plesk domains for which you want to delete the site.
- 3 Click  **Deny Access** at the bottom of the list. The corresponding site will be removed from the SiteBuilder database.

Note:

- If some of the domain settings are changed in the Plesk control panel, such as FTP user login, password, or domain name, all these changes will be automatically applied on the SiteBuilder application side. You will not have to manually change anything through the Module interface.
- In SiteBuilder, sites can be created only for Plesk-enabled domains with physical hosting. Sites cannot be created for domains with other types of hosting, such as standard or frame forwarding.